

Electric Characteristics

Type	BEST-190P-20	BEST-200P-20	BEST-210P-20
Max Power at STC*(Pmax) [W]	190	200	210
Max Power Tolerance [%]		± 3	
Max Power Voltage (Vmp) [V]	28.8	29.1	29.6
Max Power Current (Imp) [A]	6.60	6.87	7.09
Open Circuit Voltage (Voc) [V]	36.4	36.7	36.9
Short Circuit Current (Isc) [A]	7.55	7.65	7.69
Maximum System Voltage (VDC) [V]		1000	
Cell Efficiency η_c [%]	14.51	15.27	16.01
Module Efficiency η_m [%]	12.54	13.20	13.86
Solar Cell Typ	Multicrystalline Silicon Solar Cells 150 x 150 mm		
Number of Cells		60 (6 x 10)	
Temperature Coefficient of Pmax [% / °C]		-0.45	
Temperature Coefficient of Voc [% / °C]		-(0.34 ± 0.01)	
Temperature Coefficient of Isc [% / °C]		0.065	
NOCT (Nominal Operation Cell Temperature) [°C]		45 ± 2	
STC* (Standard Test Condition): Irradiance 1000W / m ² , Module Temperature 25 °C , Air Mass 1.5			

Mechanical Characteristics

Dimensions of Module A*B*C [mm]	1582*958*40
Weight [kg]	18.4
Type of Connector	MC4


Packing Configuration

Packing Configuration	2 pcs./box
Quantity / Pallet	32 pcs./pallet or 38 pcs./pallet
Lording Capacity	448 pcs./40ft or 532 pcs./40ft(H)

Absolute Ratings


Maximum System Voltage (VDC) [V]	< 1000
Operating Temperature [°C]	-40~+85
Storage Temperature [°C]	-40~+85

Dimensions

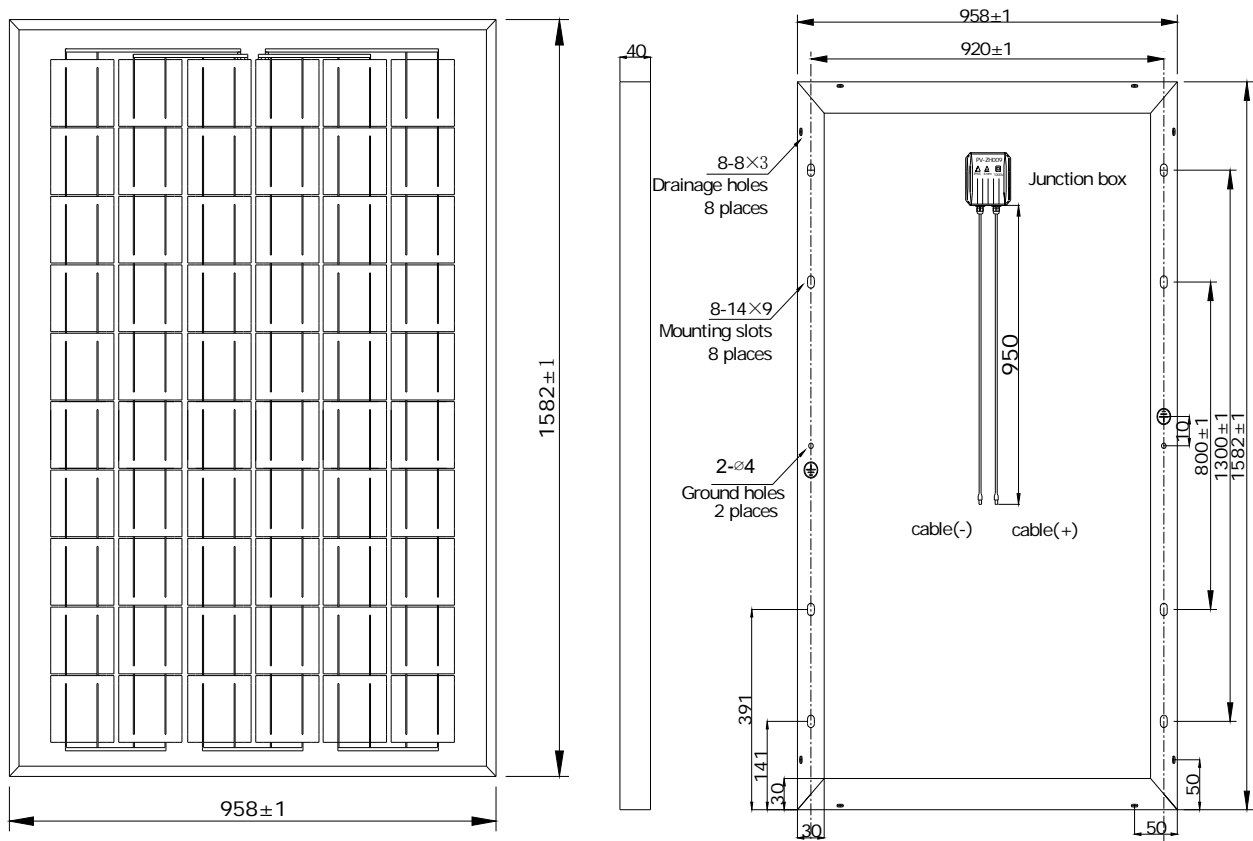

IV Curve

Electrical Performance cell temperature: 25°C

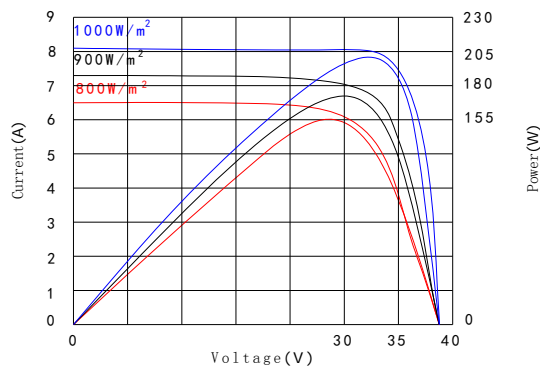

Warranty

Manufacturer

5 years

Power Output

90% for 12 years and 80% for 25 years

Certifications

IEC61215, IEC61730, UL1703, CE